


Single Channels - Galvanised

Single channel T4000T10

Material : Steel S280 GD EN10147

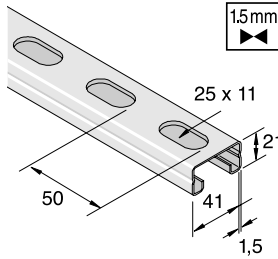


2a

Unistrut Channels 41mm

Art.Nr.	L mm	WEIGHT Kg
P4011322	2000	2.32
P4011323	3000	3.48
P4011326	6000	6.96


L(mm)	$\sigma=175 \text{ N/mm}^2$		$\sigma=175 \text{ N/mm}^2$		$\delta = 1/200L$	$\delta = 1/360L$	F(kN)
	Fmax(kN)	$\delta_{\text{max}}(\text{mm})$	Fmax(kN)	$\delta_{\text{max}}(\text{mm})$	F (kN)	F (kN)	
250	1.957	0.41	3.914	0.51	-	-	-
500	0.976	1.66	1.952	2.07	-	1.305	-
750	0.652	3.73	1.305	4.66	1.040	0.579	-
1000	0.486	6.63	0.971	8.29	0.589	0.324	-
1250	0.387	10.37	0.775	12.96	0.373	0.206	-
1500	0.324	14.94	0.647	18.67	0.255	-	-
1750	0.280	20.33	0.559	25.41	-	-	-
2000	0.240	26.55	0.481	33.19	-	-	-



$A = 1.30 \text{ cm}^2$
 $\hat{m} = 1.16 \text{ kg/m}$
 $I_{y-y} = 0.75 \text{ cm}^4$
 $Z_{y-y} = 0.70 \text{ cm}^3$
 $r_{y-y} = 0.76 \text{ cm}$
 $I_{z-z} = 3.64 \text{ cm}^4$
 $Z_{z-z} = 1.76 \text{ cm}^3$
 $r_{z-z} = 1.67 \text{ cm}$


Single channel T2000T

Material : Steel DX51D + Z275 - EN 10142

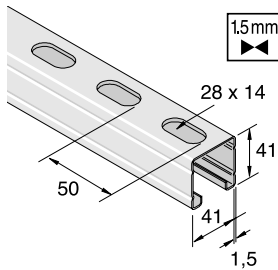

Art.Nr.	L mm	WEIGHT Kg
P2011223	3000	4.827
P2011226	6000	9.739

L(mm)	$\sigma=160 \text{ N/mm}^2$		$\sigma=160 \text{ N/mm}^2$		$\delta = 1/200L$	$\delta = 1/360L$	F(kN)
	Fmax(kN)	$\delta_{\text{max}}(\text{mm})$	Fmax(kN)	$\delta_{\text{max}}(\text{mm})$	F (kN)	F (kN)	
250	5.221	0.19	10.441	0.24	-	-	11.350
500	2.615	0.77	5.230	0.96	-	-	11.183
750	1.737	1.73	3.474	2.16	-	-	10.654
1000	1.298	3.07	2.597	3.84	-	1.165	9.310
1250	1.033	4.77	2.066	5.96	-	0.748	7.799
1500	0.865	6.94	1.730	8.68	-	0.51	6.543
1750	0.735	9.42	1.470	11.78	0.68	0.371	5.552
2000	0.640	12.31	1.280	15.39	0.515	0.277	4.787
2250	0.565	15.62	1.130	19.53	0.4	0.213	4.179
2500	0.503	19.24	1.006	24.05	0.316	0.166	3.698




$A = 1.92 \text{ cm}^2$
 $\hat{m} = 1.72 \text{ kg/m}$
 $I_{y-y} = 4.24 \text{ cm}^4$
 $Z_{y-y} = 2.04 \text{ cm}^3$
 $r_{y-y} = 1.48 \text{ cm}$
 $I_{z-z} = 6.10 \text{ cm}^4$
 $Z_{z-z} = 2.95 \text{ cm}^3$
 $r_{z-z} = 1.78 \text{ cm}$

*k.L/r >= 180 < 250

Single Channels - Galvanised


Single channel T3100T10

Material : Steel DX51D + Z275 - EN 10142

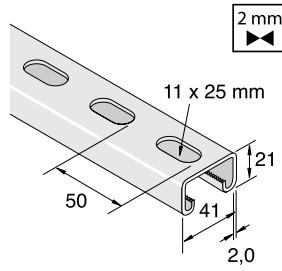


Art.Nr.	L mm	WEIGHT Kg
P3111322	2000	2.88
P3111323	3000	4.32
P3111326	6000	8.64

L(mm)	$\sigma=175 \text{ N/mm}^2$		$\sigma=175 \text{ N/mm}^2$		F (kN)	F (kN)	F (kN)
	Fmax(kN)	$\delta_{\text{max}}(\text{mm})$	Fmax(kN)	$\delta_{\text{max}}(\text{mm})$			
250	2,492	0,40	4,983	0,50	-	-	-
500	1,246	1,61	2,492	2,01	-	1,707	-
750	0,829	3,63	1,658	4,54	1,364	0,755	-
1000	0,623	6,46	1,246	8,07	0,765	0,422	-
1250	0,495	10,09	0,991	12,61	0,491	0,265	-
1500	0,412	14,54	0,824	18,17	0,334	-	-
1750	0,353	19,78	0,706	24,73	0,245	-	-
2000	0,309	25,84	0,618	32,30	-	-	-




Single channel T1100T

Material : Steel S280 + Z275 - EN 10326 : 2004

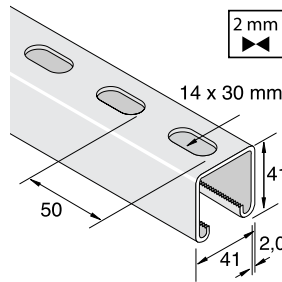

Art.Nr.	L mm	WEIGHT Kg
P1111222	2000	4.36
P1111223	3000	6.54
P1111226	6000	13.08

L(mm)	$\sigma=175 \text{ N/mm}^2$		$\sigma=175 \text{ N/mm}^2$		F (kN)	F (kN)	F (kN)
	Fmax(kN)	$\delta_{\text{max}}(\text{mm})$	Fmax(kN)	$\delta_{\text{max}}(\text{mm})$			
250	6,605	0,19	13,210	0,24	-	-	-
500	3,302	0,77	6,604	0,96	-	-	-
750	2,202	1,73	4,404	2,17	-	-	-
1000	1,651	3,07	3,302	3,86	-	1,492	-
1250	1,321	4,80	2,642	6,10	-	0,955	-
1500	1,101	6,92	2,202	8,80	-	0,663	-
1750	0,944	9,41	1,888	12,00	0,877	0,487	-
2000	0,826	12,29	1,652	15,73	0,672	0,373	-
2250	0,734	15,56	1,468	20,00	0,531	0,295	-
2500	0,660	19,21	1,320	24,90	0,430	0,239	-






Single Channels - Galvanised

Unistrut single channel P3300

Material : Steel S280 + Z275 - EN 10326 : 2004

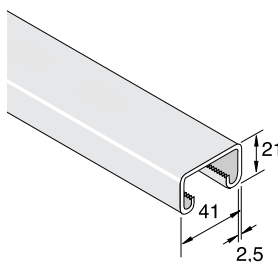


2a

Unistrut Channels 41mm

Art.Nr.	L mm	WEIGHT Kg
P3311123	3000	5.36
P3311126	6000	10.72

L(mm)	$\sigma=175 \text{ N/mm}^2$		$\sigma=175 \text{ N/mm}^2$		$\delta=1/200L$	$\delta=1/360L$	F(kN)
	Fmax(kN)	δ_{max} (mm)	Fmax(kN)	δ_{max} (mm)	F(kN)	F(kN)	
250	2.712	0.36	5.425	0.45	-	-	10.222
500	1.354	1.45	2.708	1.81	-	2.080	9.761
750	0.903	3.26	1.805	4.07	1.658	0.922	8.427
1000	0.677	5.79	1.354	7.24	0.932	0.520	6.769
1250	0.540	9.06	1.079	11.32	0.598	0.324	5.376
1500	0.451	13.04	0.903	16.30	0.412	0.226	4.287*
1750	0.387	17.75	0.775	22.19	0.304	-	3.463*
2000	0.338	23.19	0.677	28.99	0.226	-	-




A = 2.32 cm²
 λ/m = 1.91 kg/m
 I_{y-y} = 1.19 cm⁴
 Z_{y-y} = 0.97 cm³
 r_{y-y} = 0.71 cm
 I_{z-z} = 5.34 cm⁴
 Z_{z-z} = 2.59 cm³
 r_{z-z} = 1.51 cm

*kL/r =>180 < 250


Unistrut single channel P3300T10

Material : Steel S280 + Z275 - EN 10326 : 2004

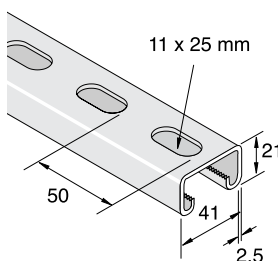

Art.Nr.	L mm	WEIGHT Kg
P3311322	2000	3.14
P3311323	3000	4.71
P3311326	6000	9.42

L(mm)	$\sigma=175 \text{ N/mm}^2$		$\sigma=175 \text{ N/mm}^2$		$\delta=1/200L$	$\delta=1/360L$	F(kN)
	Fmax(kN)	δ_{max} (mm)	Fmax(kN)	δ_{max} (mm)	F(kN)	F(kN)	
250	2.492	0.40	4.983	0.50	-	-	-
500	1.246	1.61	2.492	2.01	-	1.707	-
750	0.829	3.63	1.658	4.54	1.364	0.755	-
1000	0.623	6.46	1.246	8.07	0.765	0.422	-
1250	0.495	10.09	0.991	12.61	0.491	0.265	-
1500	0.412	14.54	0.824	18.17	0.334	-	-
1750	0.353	19.78	0.706	24.73	0.245	-	-
2000	0.309	25.84	0.618	32.30	-	-	-




A = 1.97 cm²
 λ/m = 1.76 kg/m
 I_{y-y} = 0.98 cm⁴
 Z_{y-y} = 0.89 cm³
 r_{y-y} = 0.70 cm
 I_{z-z} = 5.29 cm⁴
 Z_{z-z} = 2.56 cm³
 r_{z-z} = 1.63 cm

2.005

Single Channels - Galvanised

Unistrut single channel P1000

Material : Steel S280 + Z275 - EN 10326 : 2004

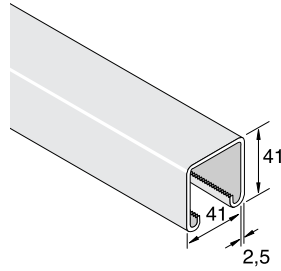


2a

Unistrut Channels 41mm

Art.Nr.	L mm	WEIGHT Kg
P1011126	6000	15.754

L(mm)	$\sigma=175 \text{ N/mm}^2$		$\sigma=175 \text{ N/mm}^2$		$\delta = 1/200L$ F (kN)	$\delta = 1/360L$ F (kN)	F (kN)
	Fmax(kN)	$\delta_{\text{max}}(\text{mm})$	Fmax(kN)	$\delta_{\text{max}}(\text{mm})$			
250	8,677	0,18	17,354	0,23	-	-	16,608
500	4,336	0,76	8,672	0,95	-	-	16,187
750	2,889	1,72	5,778	2,15	-	5,602	15,245
1000	2,168	3,06	4,336	3,82	-	3,149	13,685
1250	1,731	4,78	3,463	5,97	-	2,011	12,086
1500	1,442	6,88	2,884	8,60	2,521	1,393	10,722
1750	1,236	9,36	2,472	11,70	1,844	1,020	9,575
2000	1,084	12,23	2,168	15,29	1,413	0,785	8,623
2250	0,961	15,48	1,923	19,35	1,118	0,618	7,819
2500	0,863	19,11	1,727	23,89	0,903	0,500	7,112




A = 3,35 cm²
 ρ/m = 2,88 kg/m
 I y-y = 7,21 cm⁴
 Z y-y = 3,10 cm³
 r y-y = 1,46 cm
 I z-z = 9,23 cm⁴
 Z z-z = 4,47 cm³
 r z-z = 1,66 cm

*k.L/r =>180 < 250


Unistrut single channel P1000T

Material : Steel S280 + Z275 - EN 10326 : 2004

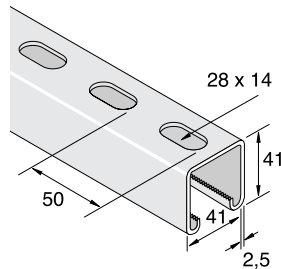

Art.Nr.	L mm	WEIGHT Kg
P1011222	2000	4.923
P1011223	3000	7.385
P1011226	6000	14.779

L(mm)	$\sigma=175 \text{ N/mm}^2$		$\sigma=175 \text{ N/mm}^2$		$\delta = 1/200L$ F (kN)	$\delta = 1/360L$ F (kN)	F (kN)
	Fmax(kN)	fmax(mm)	Fmax(kN)	fmax(mm)			
250	8,034	0,22	16,069	0,27	-	-	16,283
500	4,017	0,84	8,034	1,05	-	-	16,039
750	2,678	1,88	5,356	2,35	-	4,738	15,274
1000	2,006	3,34	4,012	4,18	-	2,659	13,626
1250	1,604	5,23	3,208	6,54	3,071	1,707	11,880
1500	1,339	7,53	2,678	9,41	2,129	1,177	10,418
1750	1,148	10,25	2,296	12,81	1,560	0,863	9,231
2000	1,001	13,38	2,001	16,73	1,197	0,657	8,270
2250	0,893	16,94	1,785	21,18	0,942	0,520	7,465
2500	0,800	20,92	1,599	26,15	0,765	0,422	6,779



A = 3,00 cm²
 ρ/m = 2,73 kg/m
 I y-y = 6,10 cm⁴
 Z y-y = 2,87 cm³
 r y-y = 1,42 cm
 I z-z = 9,17 cm⁴
 Z z-z = 4,44 cm³
 r z-z = 1,74 cm

*k.L/r =>180 < 250


TYCENSUP 06/09



Single Channels - Galvanised

Unistrut single channel P5500T

Material : Steel S280 + Z275 - EN 10326 : 2004

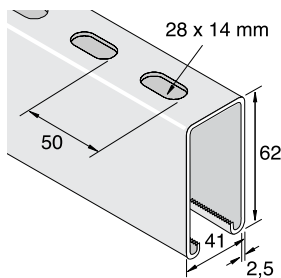


2a

Unistrut Channels 41mm


Art.Nr.	L mm	WEIGHT Kg
P5511223	3000	9.76
P5511226	6000	19.52

L(mm)	$\sigma=167 \text{ N/mm}^2$		$\sigma=167 \text{ N/mm}^2$		$\delta=1/200L$	$\delta=1/360L$	F(kN)
	Fmax(kN)	$\delta_{max}(mm)$	Fmax(kN)	$\delta_{max}(mm)$	F(kN)	F(kN)	
250	-	-	-	-	-	-	20.277
500	-	-	-	-	-	-	20.081
750	4,964	1,20	9,928	1,50	-	-	18,443
1000	3,723	2,14	7,446	2,67	-	-	15,245
1250	2,977	3,34	5,955	4,18	-	4,944	12,557
1500	2,482	4,82	4,964	6,02	-	3,434	10,507
1750	2,124	6,55	4,248	8,19	-	2,521	8,966
2000	1,859	8,56	3,718	10,70	3,473	1,923	7,789
2250	1,653	10,84	3,306	13,55	2,747	1,521	6,867
2500	1,486	13,38	2,972	16,73	2,217	1,236	6,141




Unistrut single channel P5000T

Material : Steel S280 + Z275 - EN 10326 : 2004

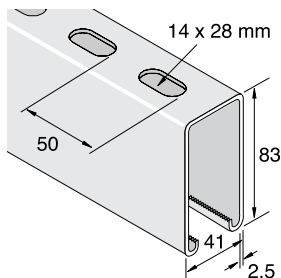

Art.Nr.	L mm	WEIGHT Kg
P5011223	3000	12.168
P5011226	6000	24.337

L(mm)	$\sigma=132 \text{ N/mm}^2$		$\sigma=132 \text{ N/mm}^2$		$\delta=1/200L$	$\delta=1/360L$	F(kN)
	Fmax(kN)	$\delta_{max}(mm)$	Fmax(kN)	$\delta_{max}(mm)$	F(kN)	F(kN)	
250	-	-	-	-	-	-	19,620
500	-	-	-	-	-	-	19,355
750	6,298	0,71	12,596	0,89	-	-	16,422
1000	4,724	1,27	9,447	1,59	-	-	12,822
1250	3,777	1,98	7,554	2,48	-	-	10,124
1500	3,149	2,86	6,298	3,58	-	-	8,182
1750	2,698	3,89	5,396	4,86	-	-	6,769
2000	2,359	5,09	4,719	6,36	-	4,120	5,719
2250	2,099	6,44	4,199	8,05	-	3,257	4,934
2500	1,888	7,94	3,777	9,93	-	2,639	4,326



2.007


Single Channels - Galvanised

Unistrut single channel P8000T

Material : Steel S280 + Z275 - EN 10326 : 2004


2a

Unistrut Channels 41mm

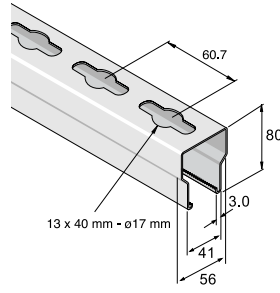

Art.Nr.	L mm	WEIGHT Kg
P8012526	6000	31.65

L(mm)				
	F _{max} (kN)	δ δ_{max} (mm)	$\delta = 1/200L$ F (kN)	$\delta = 1/360L$ F (kN)
250	-	-	-	-
500	29,160	0,44	-	-
750	19,424	0,98	-	-
1000	14,540	1,75	-	-
1250	11,610	2,73	-	-
1500	9,650	3,93	-	-
1750	8,250	5,35	-	7,481
2000	7,190	6,98	-	5,700
2250	6,370	8,84	-	4,471
2500	5,710	10,91	-	3,588






Double Channel - Galvanised

Unistrut Double Channel P3301T10

Material : Steel S280 + Z275 - EN 10326 : 2004



P3301T10

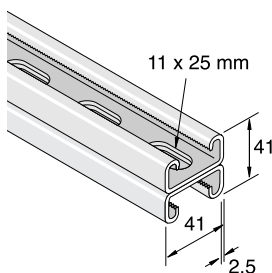


2b

Unistrut Channels 41mm

Art.Nr.	L mm	WEIGHT Kg
P3321323	3000	9.42
P3321326	6000	18.84

L(mm)	σ=175 N/mm ²		σ=175 N/mm ²		δ=1/200L F (kN)	δ=1/360L F (kN)	F (kN)
	Fmax(kN)	δmax(mm)	Fmax(kN)	δmax(mm)			
250	7.613	0.21	15.225	0.26	-	-	17.266
500	3.806	0.86	7.613	1.07	-	-	17.030
750	2.536	1.94	5.072	2.42	-	4.365	16.599
1000	1.903	3.44	3.806	4.30	-	2.453	15.667
1250	1.521	5.38	3.041	6.72	2.825	1.570	14.156
1500	1.265	7.74	2.531	9.68	1.962	1.089	12.478
1750	1.084	10.54	2.168	13.18	1.442	0.795	10.899
2000	0.952	13.77	1.903	17.21	1.099	0.608	9.496
2250	0.844	17.42	1.687	21.78	0.873	0.481	8.289*
2500	0.760	21.49	1.521	26.86	0.706	0.392	7.250*



A = 3.94 cm²
 Δ/m = 3.53 kg/m
 I y-y = 5.62 cm⁴
 Z y-y = 2.72 cm³
 r y-y = 1.19 cm
 I z-z = 10.58 cm⁴
 Z z-z = 5.12 cm³
 r z-z = 1.63 cm


*k.L/r >= 180 < 250

Unistrut Double Channel P1001T

Material : Steel S280 + Z275 - EN 10326 : 2004




P1001T

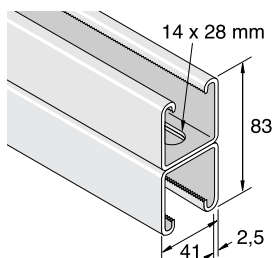

Art.Nr.	L mm	WEIGHT Kg
P1021223	3000	14.769
P1021226	6000	29.538

L(mm)	σ=175 N/mm ²		σ=175 N/mm ²		δ=1/200L F (kN)	δ=1/360L F (kN)	F (kN)
	Fmax(kN)	δmax(mm)	Fmax(kN)	δmax(mm)			
250	-	-	-	-	-	-	27.458
500	-	-	-	-	-	-	27.311
750	8.182	0.97	16.363	1.21	-	-	27.027
1000	6.136	1.72	12.272	2.15	-	-	26.585
1250	4.910	2.69	9.820	3.36	-	-	25.830
1500	4.091	3.87	8.182	4.84	-	7.034	24.584
1750	3.057	5.27	7.014	6.59	-	5.170	22.906
2000	3.066	6.89	6.131	8.61	-	3.953	21.042
2250	2.727	8.72	5.454	10.90	-	3.120	19.198
2500	2.453	10.77	4.905	13.46	4.552	2.531	17.452



A = 6.00 cm²
 Δ/m = 5.47 kg/m
 I y-y = 36.21 cm⁴
 Z y-y = 8.77 cm³
 r y-y = 2.45 cm
 I z-z = 18.34 cm⁴
 Z z-z = 8.88 cm³
 r z-z = 1.74 cm


*k.L/r >= 180 < 250

2.009

Double Channel - Galvanised

Unistrut Double Channel P5501T

Material : Steel S280 + Z275 - EN 10326 : 2004

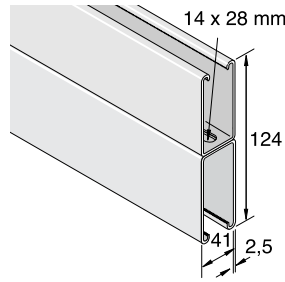


2b

Unistrut Channels 41mm


Art.Nr.	L mm	WEIGHT Kg
P5521226	6000	39.04

L(mm)	$\sigma=167 \text{ N/mm}^2$		$\sigma=167 \text{ N/mm}^2$		$\delta=1/200L$ F (kN)	$\delta=1/360L$ F (kN)	F(kN)
	Fmax(kN)	$\delta_{\text{max}}(\text{mm})$	Fmax(kN)	$\delta_{\text{max}}(\text{mm})$			
750	-	-	-	-	-	-	34.257
1000	-	-	-	-	-	-	33.766
1250	-	-	-	-	-	-	32.971
1500	7.873	2.46	15.745	3.07	-	-	31.667
1750	6.749	3.34	13.499	4.18	-	-	29.822
2000	5.906	4.38	11.811	5.47	-	-	27.674
2250	5.248	5.54	10.497	6.92	-	9.476	25.457
2500	4.724	6.83	9.447	8.54	-	7.671	23.299
2750	4.292	8.27	8.584	10.34	-	6.337	21.288
3000	3.934	9.84	7.868	12.30	-	5.327	19.443




Unistrut Double Channel P5001T

Material : Steel S280 + Z275 - EN 10326 : 2004

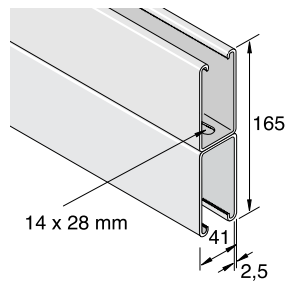

Art.Nr.	L mm	WEIGHT Kg
P5021226	6000	48.674

L(mm)	$\sigma=132 \text{ N/mm}^2$		$\sigma=132 \text{ N/mm}^2$		$\delta=1/200L$ F (kN)	$\delta=1/360L$ F (kN)	F(kN)
	Fmax(kN)	$\delta_{\text{max}}(\text{mm})$	Fmax(kN)	$\delta_{\text{max}}(\text{mm})$			
750	-	-	-	-	-	-	33.825
1000	-	-	-	-	-	-	33.432
1250	12.267	1.00	24.535	1.25	-	-	32.864
1500	10.222	1.44	20.444	1.80	-	-	32.010
1750	8.760	1.96	17.521	2.45	-	-	30.764
2000	7.667	2.56	15.333	3.20	-	-	29.165
2250	6.813	3.24	13.626	4.05	-	-	27.350
2500	6.131	4.00	12.263	5.00	-	-	25.467
2750	5.577	4.84	11.154	6.05	-	-	23.613
3000	5.111	5.77	10.222	7.21	-	-	21.847



TYCENSUP 06/09




Double Channel - Galvanised

Unistrut Double Channel P8001T

Material : Steel S280 + Z275 - EN 10326 : 2004



P8001T

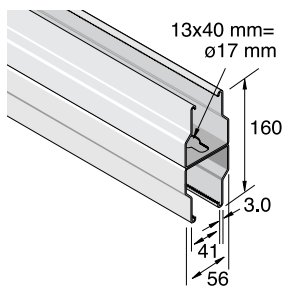


2b

Unistrut Channels 41mm

Art.Nr.	L mm	WEIGHT Kg
P8022526	6000	63.3

L(mm)				
	F _{max} (kN)	δ_{max} (mm)	F (kN)	F (kN)
750				
1000	41.000	0.99	-	-
1250	32.856	1.55	-	-
1500	27.330	2.23	-	-
1750	23.380	3.04	-	-
2000	20.410	3.97	-	-
2250	18.090	5.03	-	-
2500	16.238	6.21	-	-
2750	14.713	7.51	-	-
3000	13.44	8.94	-	12.510




$A = 12.71 \text{ cm}^2$
 $m/m = 10.78 \text{ kg/m}$
 $I_{y-y} = 257.3 \text{ cm}^4$
 $Z_{y-y} = 32.2 \text{ cm}^3$
 $r_{y-y} = 4.50 \text{ cm}$
 $I_{z-z} = 55.54 \text{ cm}^4$
 $Z_{z-z} = 19.84 \text{ cm}^3$
 $r_{z-z} = 2.09 \text{ cm}$

2.011

Channel Accessories

Endcaps for Unistrut Channel

Material : Polypropylene

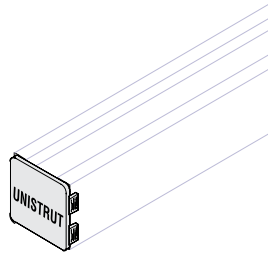


Art.Nr.	Color	W mm	H mm	⊕ Kg /100	
1392196	white	41	21	0.3	25
1392197	Black	41	21	0.3	25
1392198	Bleu	41	21	0.3	25
1394196	White	41	41	0.5	25
1394197	Black	41	41	0.5	25
1394198	Bleu	41	41	0.5	25
1396296	White	41	62	0.8	25
1396297	Black	41	62	0.8	25
1396298	Bleu	41	62	0.8	25

Cover for Unistrut Channel

Material : Steel DD11 - EN 10111

PVC - white

PVC - black

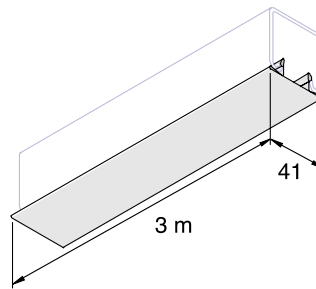

Art.Nr.	Material	WEIGHT Kg	
P1184-F	Steel	1.07	1
P1184-PB	PVC-White	0.48	1
P1184-PW	PVC-Black	0.48	1

2c

Unistrut Channels 41mm

TYCENSUP 06/09



Galvanised


Cantilever arm 41x41x2mm T2774T


Material : Steel DD11 - En 1011


Finish : Electro zinc plated - DIN EN 12329



T2774T10

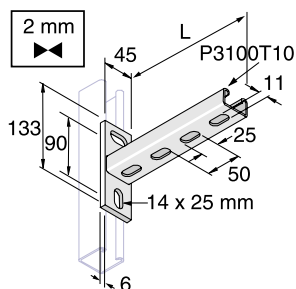

Art.Nr.	L mm	kg /100	
P2774T1505	150	47.0	10
P2774T3005	300	70.0	1
P2774T4505	450	94.0	1

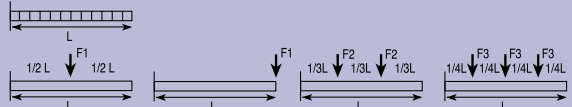Art.nr.	kg	L (mm)				
			1.94 kN	0.97 kN	0.97 kN	0.64 kN
P2774T1505	0,47	150	1.94 kN	0.97 kN	0.97 kN	0.64 kN
P2774T3005	0,70	300	1.00 kN	0.50 kN	0.50 kN	0.33 kN
P2774T4505	0,94	450	0.67 kN	0.33 kN	0.33 kN	0.22 kN


3.003

Galvanised

Cantilever arm 41x41x2mm T2773T

Material : Steel DD11 - EN 10111

Finish : Electro zinc plated - DIN EN 12329

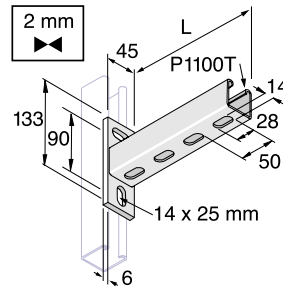

Cantilever Arms & Angle Brackets

Art.Nr.	L mm	\bar{m} Kg /100	
P2773T1505	150	64.0	10
P2773T3005	300	101.0	1
P2773T4505	450	137.0	1
P2773T6005	600	173.0	1

Art.Nr.	\bar{m}	L (mm)	F_1	F_1	F_2	F_3
P2773T1505	0,64	150	4,83 kN	2,41 kN	2,41 kN	1,61 kN
P2773T3005	1,01	300	2,41 kN	1,21 kN	1,21 kN	0,80 kN
P2773T4505	1,37	450	1,61 kN	0,80 kN	0,80 kN	0,54 kN
P2773T6005	1,73	600	1,21 kN	0,60 kN	0,60 kN	0,40 kN

Galvanised


Unistrut cantilever arm 41x41x2.5mm

Material : Steel S280JR - EN 10025

Finish : Electro zinc plated - DIN EN 12329



P2663T

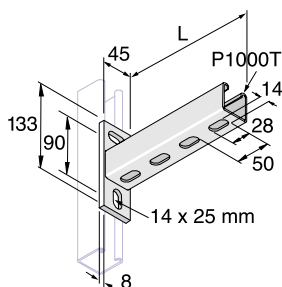

Art.Nr.	L mm	kg /100	
P2663T1505	150	78.6	10
P2663T3005	300	117.8	1
P2663T4505	450	160.7	1
P2663T6005	600	203.3	1
P2663T7505	750	253	1

Art.Nr.	P	kg	L (mm)	L	F1	F1	F2	F3
P2663T1505	5	0,96	150	6,12 kN	3,06 kN	3,06 kN	2,04 kN	
P2663T3005	5	1,30	300	3,06 kN	1,53 kN	1,53 kN	1,02 kN	
P2663T4505	5	1,74	450	2,04 kN	1,02 kN	1,02 kN	0,68 kN	
P2663T6005	5	2,06	600	1,53 kN	0,76 kN	0,76 kN	0,50 kN	
P2663T7505	5	2,30	750	1,22 kN	0,61 kN	0,61 kN	0,40 kN	


Cantilever arm with bracing

Material : Steel DD11 - EN 10111

Finish : Electro zinc plated - DIN EN 12329



P2700T

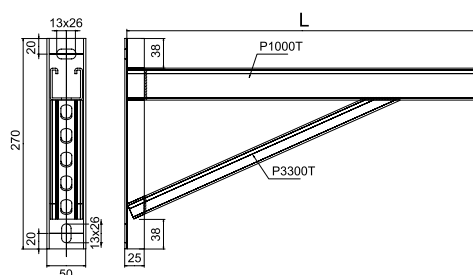

Art.Nr.	L mm	kg /100	
1394132	300	249.0	1
1394142	450	340.0	1
1394162	600	449.0	1